



# AUTOCAR PARTS MONTHLY UPDATE

---

---

PARTS BULLETIN

\*JANUARY 2008

---

---

IN THIS MONTHS ISSUE:

1. INSULATION RETRO FIT FOR WX CAB
2. WILLIAMS CROSS – OVER RELAY
3. AUTOCAR ONLINE LITERATURE CENTER
4. HORTON REMAN SUPER KIT
5. RADIO SUPERSESSION
6. TURN SIGNAL MOUNT

## **1. INSULATION RETRO FIT FOR WX CAB**

THIS IS A NEW DEVELOPING INSULATION RETRO FIT TO QUIET DOWN THE INTERIOR OF OUR CABS. THIS IS BEING USED IN 07 BUILDS BUT IT SEEMS SOME CUSTOMERS WOULD LIKE TO USE IT ON THE OLD TRUCKS TO HELP BLOCK SOME OF THE NOISE ALSO. IF YOU ARE INTERESTED IN QUIETING DOWN YOUR CAB YOU WILL NEED ONE EACH OF THE FOLLOWING GROUP OF PARTS AS WE WILL NOT BE GROUPING OR KITTING THESE PARTS:


PART NUMBER	DESCRIPTION
A5380007-001	MATTING FLOOR, RH WX
A5380011-001	MATTING FLOOR, LH WX/WX DD
A5380012-001	MATTING FRT FLOOR, LH WX/WX DD
A5380016-001	PLATE, HEEL
A5460011-001	INSUL, TOP TUNNEL, EXT WX/WXR 07
A5460022-001	INSUL, SIDE TUNNEL, LH EXT WX
A5460022-002	INSUL, SIDE TUNNEL, RH EXT WX
A5460023-001	INSUL TUNNEL SLOPE, LH EXT WX/R
A5460024-001	INSUL TUNNEL SLOPE, RH EXT WX/R

## **2. WILLIAMS CROSS – OVER RELAY**

IT HAS COME TO OUR ATTENTION THAT WILLIAMS HAS HAD MULTIPLE FIELD ISSUES ON PART #A1330005-001. WE HAVE A TECHNICAL SERVICE BULLETIN OUT STATING THAT PART #A1330005-001 NEEDS TO BE REMOVED AND REPLACED WITH PART #S1330100-001 (#134224). THE BULLETIN ALSO CONTAINS INSTRUCTIONS ON HOW TO REPLACE THE THROTTLE CROSS-OVER RELAY. WE ALSO WOULD LIKE OUR DEALERS TO KNOW THAT WE ARE NO LONGER SELLING THIS PART AND ARE ASKING ALL DEALERS THAT ARE STILL CARRYING STOCK TO PLEASE BE ADVISED TO RETURN IT. IF YOU HAVE ANY QUESTIONS REGARDING ANY PART OF THIS PLEASE CONTACT OUR AUTOCAR TECHNICAL SUPPORT @ 877-973-3486.

## **3. AUTOCAR ONLINE LITERATURE CENTER**

YOU CAN NOW ORDER VIN SPECIFIC PARTS CATALOGS ON LINE AT [WWW.AUTOCARTRUCK.COM](http://WWW.AUTOCARTRUCK.COM), ONCE THERE CLICK ON SERVICE PARTS. THEN YOU WILL NEED TO CLICK ON THE VIN-SPECIFIC PARTS CD LINK, AS SHOWN BELOW, AND INPUT YOUR DEALER NUMBER AS YOUR USER NAME, AND "DEALER" AS YOUR PASSWORD. YOU CAN ORDER VIN SPECIFIC PARTS CD'S FROM THIS LINK AS WELL AS SERVICE OR OPERATORS MANUALS. YOU JUST ADD THE SELECTED LITERATURE TO YOUR SHOPPING CART AND ONCE YOU ARE DONE YOU ARE THEN READY TO CHECK OUT.

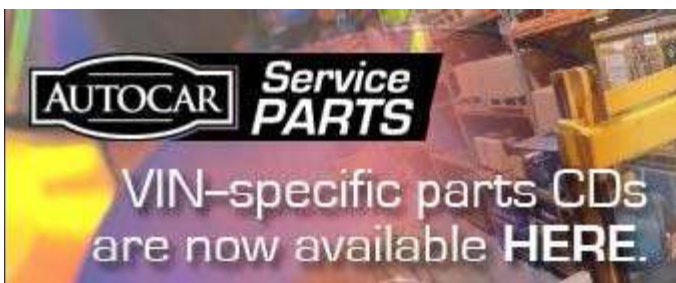

## **4. HORTON REMAN SUPER KIT**

NOW AVAILABLE WE HAVE A HORTON REBUILD KIT FOR A FAN CLUTCH, PART #A2080001-004. THIS KIT WILL SERVICE A NUMBER OF OUR FAN DRIVE CLUTCHES.

## **5. RADIO SUPERSESSION**

WE HAVE INVESTIGATED THE ACCURACY OF THE INFORMATION THAT RADIO #A5900017-002 DIRECTLY REPLACING RADIO #A5900011-002 BEING CONCERNED THAT THE HARNESS CONNECTIONS WEREN'T COMPATIBLE AND FOUND THAT TO BE TRUE. WE DETERMINED THAT THE NEW A5900017-002 (BY CUSTOM RADIO CORP) WILL NOT PLUG DIRECTLY INTO THE HARNESS THAT WAS USED IN THE TRUCK FOR THE A5900011-002 (BY CLARION) AND IF THE CLARION RADIO IS TO BE REPLACED BY THE NEW CUSTOM RADIO, IT MUST BE ACCOMPANIED BY HARNESS A5900019-002. WE HAVE SET UP KIT #S5900002-001 (CONTAINING THE NEW RADIO AND NEW HARNESS) AS THE DIRECT REPLACEMENT OF THE A5900011-002. THE NEW RADIO AND HARNESS ARE ALSO LISTED SEPARATELY ON THE EPC SO THEY CAN BE PURCHASED SEPARATELY IF THE CUSTOMER ALREADY HAS THE A5900017-002.

## **6. TURN SIGNAL MOUNT**

PART #3081530 HAS FIVE HOLES WITH A DIAMETER OF .281 WHEREAS THE 84104-0008 HAS TWO HOLES WITH A DIAMETER OF .375 WITH THE OTHER THREE BEING .281. THE TWO .375 HOLES ARE USED TO MOUNT THE TURN SIGNAL. THE TECHNICIAN MAY HAVE TO ADD A WASHER TO PREVENT THE MOUNTING FASTENER FROM PULLING THROUGH, BUT OTHER THAN THAT, THE PARTS ARE THE SAME AND WE CAN SUB PART #84104-0008 FOR 3081530.